



# TMARK

## YOUR GREEN CODING SOLUTION

We are not only manufacturing the TTO, we are also offering the coding solution for flexible package.

Tmark TTO is an ideal coding solution for soft package applications, such as aluminum pouch, plastic film, labels and etc..., to achieve the high resolution print quality of text and graphics.



Tmark TTO is an ideal coding solution for soft package applications, such as aluminum pouch, plastic film, labels and etc..., to achieve the high resolution print quality of text and graphics.

### Variable Applications:

- Horizontal Continuous packaging machine
- Vertical Intermittent packaging machine
- Labeling Machine
- Feeder



### Key Features:

#### Easy to Operate

- 7" LED touch screen
- Easy to use and operate
- Easy to replace the ribbon

#### Reliable

- Superior quality components
- More than 20 years experience
- Stable and reliable
- Approved in various industries

#### Crispy Print

- 300DPI Print Resolution
- Monitor every print status
- Lots of core technologies

#### Easy to Install

- Smaller printer unit
- Easy for integration

#### Easy Manage

- Jump date setting, unify production date
- Check output for every shift
- Record production time by lot number
- Ribbon cost calculation

#### Smart Printer


- Miss print detection
- Auto-check length of package
- Auto-check print quality
- Auto-check film roll usage
- Reduce power when standby

#### Reduced Costs


- Offset print function, maximize the use of ribbon
- Minimum gap between two prints is 0.3mm
- Longer print distance, protect the use of printhead
- Unique anti-static design, extend the life of printhead



### Controller

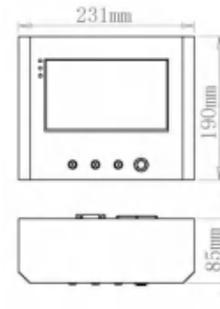

### T68 Printer

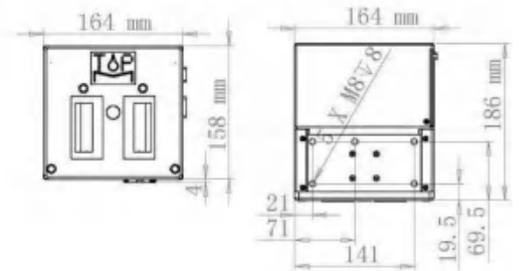


### T73 Printer



**NEW**

- No need compressed air
- Auto-adjust the height of printhead

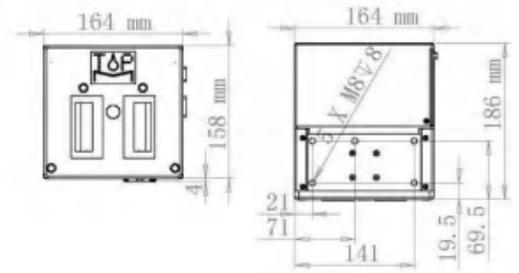


### T75 Printer



**NEW**

- No need compressed air
- Auto-adjust the height of printhead

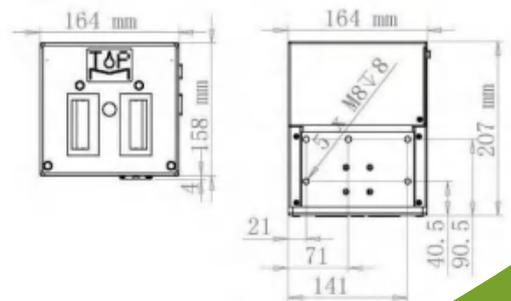

## Technical Parameters

Model No.	T68(32mm)	T73(32mm)	T75 (53mm)
Printer Mode	Intermittent and continuous combined		
Print Direction	Left hand and right hand		
Print Resolution	300DPI		
Print Area (Intermittent)	32mm x 45mm	32mm x 55mm	53mm x 55mm
Print Area (Continuous)	32mm x 100mm	32mm x 100mm	53mm x 100mm
Ribbon Length	600M	600M	600M
Ribbon Width	33mm	33mm	55mm
Print Content	Date, Time, Counter, Shift, Barcode, QR Code, Graphics, Text		
Input	Print Signal, Encoder Signal		
Output	Relay Signal Output		
Printer Size (LxWxH)	164X158X186mm	164X158X186mm	164X158X186mm
Printer Weight	6.7kgs	6.8kgs	7kgs
Power Supply	90-240VAC, 50/60Hz, 120V		
Air Supply	Pressure 6 bar	No need air	No need air
Working Environment	Temperature: 5~40°C ; Humidity: 10%-90%; No condense		
Interface	7 inch color touch screen display, WYSIWYG, error menu		
Power Box	Size (LxWxH): 231X190X85mm		Weight: 2.9kg





# TMARK

YOUR GREEN CODING SOLUTION

We are not only manufacturing the TTO, we are also offering the coding solution for flexible package.

Tmark TTO is an ideal coding solution for soft package applications, such as aluminum pouch, plastic film, labels and etc..., to achieve the high resolution print quality of text and graphics.

